



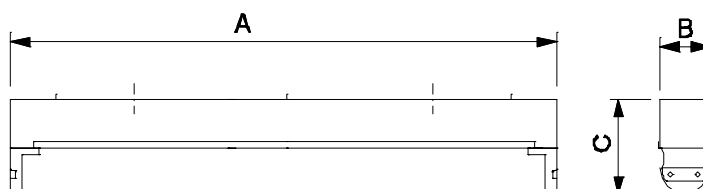

LEGEND

BTCR 128 LHD

Surface/Pendant mounting single T5 Channel



Nominal dimensions in mm Tolerance +/-5

Cat. Ref.	A	B	C
BTCR 128 LHD	1185	36	62

Applications

- Shopping malls
- Hotels & restaurants
- Offices & banks
- Education institutions, etc.

Specification

- Epoxy white powder coated CRCA sheet housing.
- Specially designed PVC end caps.
- Powder coated CRCA reflector cover plate held in position by the fixing arrangement of side plates.
- Wired with HF Electronic (< 10 % THD) ballast.
- Sleek & elegant in shape.
- Luminaire body is corrosion resistant & durable.
- Suitable for direct mounting or suspension.
- Easy access to the control gear.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BTCR 128 LHD	1 x T5 28W	240	0.135	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	28-05-2010	FOR -
	CHECKED	DVRS		REV - 0 DATE-28-05-2010
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BTCR 128 LHD - 001