





LEGEND

BTIR 128/228


## Surface/Pendant mounting single/twin T5 Channel



BTIR 128



BTIR 228

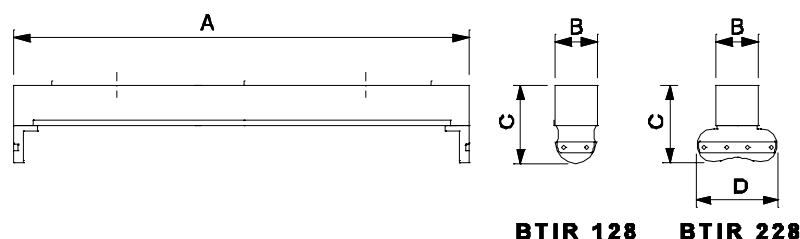

BTIR 128 BTIR 228

Nominal dimensions in mm Tolerance +/-5

Cat. Ref.	A	B	C	D
BTIR 128	1185	36	62	--
BTIR 228	1185	36	62	70

## Applications

- Shopping malls
- Hotels & restaurants
- Offices & banks
- Education institutions, etc.

## Specification

- Epoxy white powder coated CRCA sheet housing
- Specially designed PVC end caps
- Powder coated CRCA reflector cover plate held in position by the fixing arrangement of side plates
- Wired with Electronic ballast
- Sleek & elegant in shape
- Luminaire body is corrosion resistant & durable
- Suitable for direct mounting or suspension
- Easy access to the control gear

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BTIR 128	T5 1 x 28	240	0.140	≥ 0.95
BTIR 228	T5 2 x 28	240	0.271	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	VDS	05-08-2005	FOR - STD.
	CHECKED	DVRS		REV - 0 DATE-05-08-2005
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BTIR 128/228 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>