




INDUSTRIAL LIGHTING

BTI 128/154 PC

BTI 228/254 PC

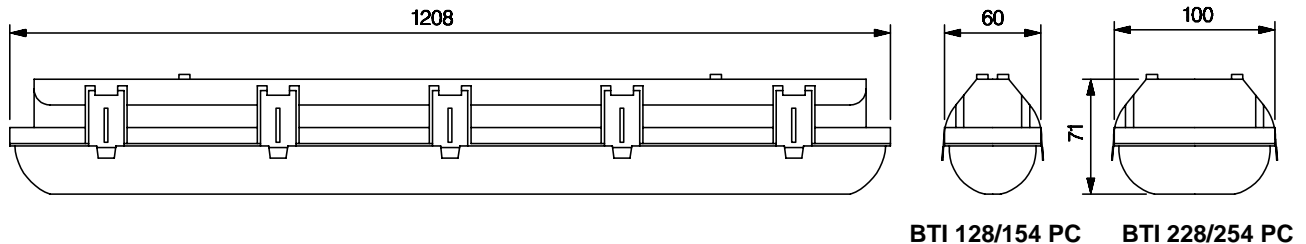

BTI 128/154 PC BTI 228/254 PC

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Dairies, Chemical industries, Food processing plant, Laboratories, Paint factories, Paper mills, Textile mills, Car washing bay, Catering kitchens, Grain shops.

Specification

- This corrosion resistance FTL lamp Luminaire comprises of control gear housing and cover made of polycarbonate wired with electronic ballast.
- CRCA gear tray cum reflector is finished in white powder coating.
- Completely prewired with accessories up to terminal block.
- Finish: Housing Grey.
- Degree of protection: IP 65

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BTI 128 PC	1 x T5 28W	240	0.14	≥ 0.95
BTI 154 PC	1 x T5 54W	240	0.22	≥ 0.95
BTI 228 PC	2 x T5 28W	240	0.27	≥ 0.95
BTI 254 PC	2 x T5 54W	240	0.50	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	03-06-2005	FOR - STD.
	CHECKED	DVRS		REV - 0 DATE-10-11-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BTI 128/228 PC - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com