




ROADWAY LIGHTING

BAJAJ BTSLF 114/124/214/224 MS

Energy efficient roadway luminaire suitable for single/twin 14/24 T5 fluorescent lamps

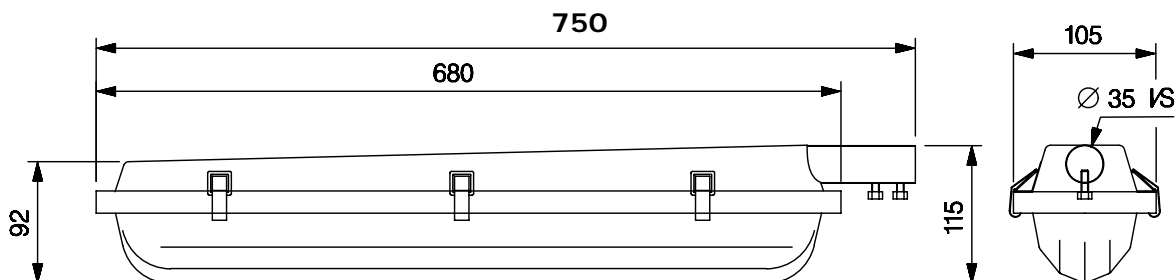

Dimensions in mm Tolerance +/-5

Applications

- Lanes and by-lanes
- Residential colonies
- Industrial complexes
- Park and gardens
- Security lighting, etc.

Specification

- Muncell grey finish CRCA sheet steel housing
- Epoxy white powder coated CRCA sheet steel gear tray covered with anodised aluminium reflector
- Accessories for single/twin 14/24W T5 lamp prewired upto the terminal block
- Clear acrylic cover with rubber gasket fixed by 6 toggles
- 30 mm OD entry for direct mounting on pipe
- Degree of protection : IP 55

Electrical Data

| Cat. Ref. | Lamp Type & Wattage (W) | Nominal Voltage (V) | Mains Current in Amps. at 240 V | Power Factor |
|--------------|-------------------------|---------------------|---------------------------------|--------------|
| BTSLF 114 MS | 1 x T5 14 | 240 | 0.075 | 0.90 |
| BTSLF 124 MS | 1 x T5 24 | 240 | 0.110 | 0.90 |
| BTSLF 214 MS | 2 x T5 14 | 240 | 0.140 | 0.90 |
| BTSLF 224 MS | 2 x T5 24 | 240 | 0.224 | 0.90 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|---|--------------------------------------|------|------------|---|
| <p>BAJAJ LUMINAIRES Making the difference</p> | DRAWN | VDS | 14-03-2007 | FOR – Std. |
| | CHECKED | DVRS | | REV - 0 DATE-04-01-2008 |
| | APPROVED | CRR | | DRG. No |
| | DATA SHEET RELEASED ON DT- Jun.-2007 | | | TSLF 1&2x14/24 MS-001 |
| BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. | | | | * E-mail : luminaires@bajajelectricals.com |