




## LEGEND

BTSM 02 228

Surface/ Pendant mounted 2X28 W mirror optic T5 luminaire

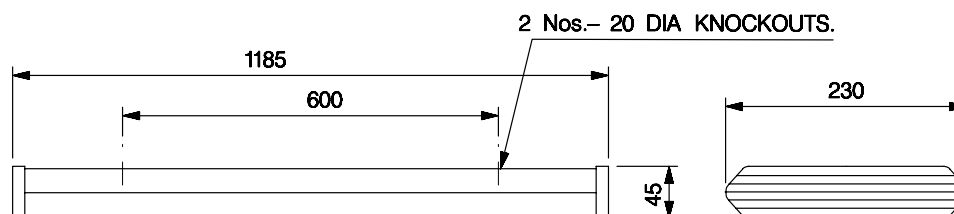

Dimensions in mm Tolerance +/-5

## Applications

- Banks & offices
- Commercial establishments
- Airport lounges
- Hospitals & laboratories
- Low ceiling height areas, etc.

## Specification

- Epoxy broken white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium mirror reflector and anodized matt finish aluminium cross louver assembly
- Reflector/louver assembly held to the housing with spring loaded trigger latches and suspended by two nylon strings for easy maintenance
- Accessories for twin 28W T5 lamps, prewired upto terminal block.
- Wired with Electronic ballast

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240 V	Power Factor
BTSM 02 228	T5 2x28	240	0.271	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	VDS	17-05-2007	FOR – STD.
	CHECKED	DVRS		REV - 0 DATE-17-05-2007
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			<b>TSM 02 228 - 001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>