




**HAZARDOUS AREA LIGHTING**  
**INCREASED SAFETY WELLGLASS INTEGRAL**  
**BJISW 80/125 MV (I)**

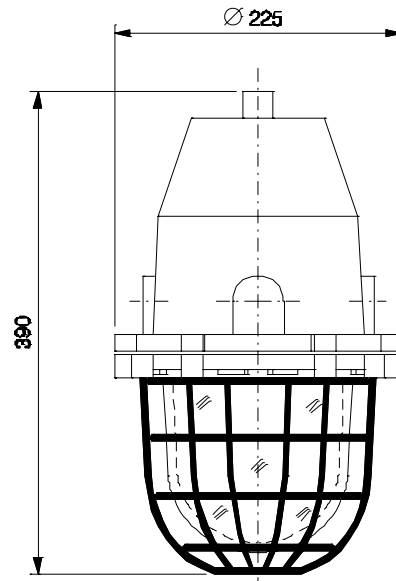

Nominal dimensions in mm - Tolerance +/-5

**Specification**

**DESCRIPTION :** Increased safety weatherproof intergal wellglass suitable for 80/125W HPMV, 70 HPSV Lamp, 150/200W GLS Lamp, 160W MLL Lamp. at 240 Volts (Max.)

**MATERIAL :** Cast Aluminium LM 6.

**GLASS :** Heat resistant wellglass.

**CABLE ENTRY :** 2 way 3/4" B.S.Conduit.

**HOLDER :** E 27 - ES enclosed break lamp holder.

**SUSPENSION :** Eye bolt.

**HINGING :** M.S. Chain is provided.

**GASKET :** Neoprene.

**IP RATING :** IP 65

**FINISH :** Light grey (631 Shade IS5) paint / Epoxy optional at extra cost.

**STANDARD :** IS : 6381 - 1972 / IS : 8224 - 1976

**GROUPS :** Zone 2

**CMRI. CERT. No. :** C.M.R.I./T.C./P/H1260 dated. 14th Oct. 1999

C.M.R.I./T.C./ADDEN/H193 dated. 16th Feb. 2000

**TEMP. CLASS :** 150/200W GLS / 125W MV / 160W MLL - T5 ; 80W MV / 70 SV - T6

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	VDS	25-06-2005	FOR – Std.
	CHECKED	VDS		REV - 0 DATE-25-06-2005
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			<b>ISWI 80/125 MV- 001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>