




LEGEND

BCSC 236 CFL WEB2

BCSC 236 CFL LHD / BCSC 236 CFL WHFA

Surface, decorative twin horizontal mounting CFL 36W direct lighting luminaire

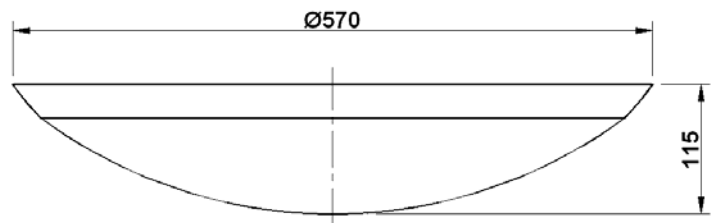

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Applications

- Commercial malls,
- Showrooms,
- Reception halls,
- Offices, shops,
- Retail shops, etc.

Specification

- Epoxy White powder coated aluminium sheet housing.
- Opal acrylic cover is elegantly designed.
- Accessories for twin 36W CFLs prewired upto terminal block.
- Mounting: provided at the back.
- Wired with HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240V	Power Factor
BCSC 236 CFL WEB2	2 x CFL 36W	240	0.311	≥ 0.95
BCSC 236 CFL LHD	2 x CFL 36W	240	0.303	≥ 0.99
BCSC 236 CFL WHFA	2 x CFL 36W	240	0.303	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	KPM	06-04-2009	FOR – STD.
	CHECKED	DVRS		REV - 0 DATE-09-07-2009
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BCSC 236 CFL - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com