




CANOPY LIGHTING - INTEGRAL LUMINAIRE

BJPP 250 MMH T CA CS

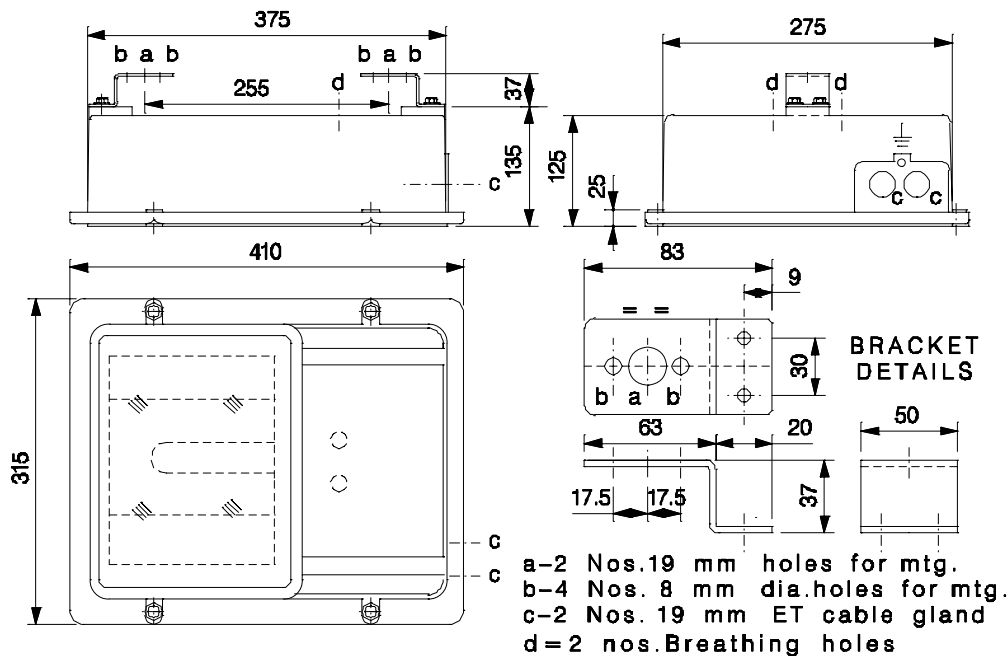

Dimensions in mm Tolerance +/-5

Application

- Petrol pumps
- Porticos
- Public halls
- Under canopy lighting, etc.

Specification

- Epoxy white powder coated recess mounting die-cast aluminium housing to accommodate lamp and control gear accessories
- Electrochemically brightened, polished and anodised aluminium reflector assembly
- Heat resistant toughened clear glass with silicon rubber gasket held in a die-cast aluminium frame and fixed by four SS screws
- Control gear for 250W MMH T lamp, lamp prewired upto the terminal block.
- Mounting: It can be done on mounting brackets as shown
- This luminaire is suitable for 150 MM panel ceiling
- Degree of protection : IP 65 (From front glass)

Note: The luminaire is suitable for Bajaj/Venture tubular lamp or equivalent lamp.
Only MV based lamp gear for 250 MH lamp is provided.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJPP 250 MMH T CA CS	MH-T 250	220/240	1.30	20	0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	04-11-2008	FOR – STD.
	CHECKED	KS		REV - 0 DATE-04-11-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			PP250MMHTCACS-001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com